


# ACR10-4N-39

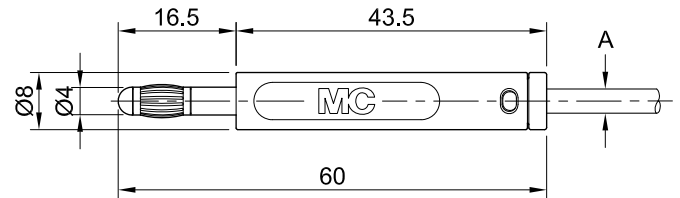


Item number 64.2052-\*

In-line, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Crimp connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 19 A / 60 V, 19 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	<span style="background-color: black; color: white; padding: 2px;">21</span> <span style="background-color: red; color: white; padding: 2px;">22</span> <span style="background-color: blue; color: white; padding: 2px;">23</span> <span style="background-color: yellow; color: black; padding: 2px;">24</span> <span style="background-color: green; color: white; padding: 2px;">25</span> <span style="border: 1px solid black; padding: 2px;">29</span>
Optional color(s)	<span style="background-color: purple; color: white; padding: 2px;">26</span> <span style="background-color: orange; color: white; padding: 2px;">27</span>
Outer diameter	8.0 mm
Test accessory acc. to	IEC EN 61010-031

# ACR10-4A-39

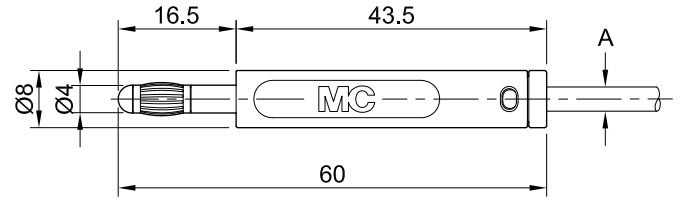


Item number 64.2053-\*

In-line, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Crimp connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 19 A / 60 V, 19 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Standard color(s) *	21 22 23 24 25 29
Optional color(s)	26 27
Outer diameter	8.0 mm
Test accessory acc. to	IEC EN 61010-031

# ACR25-4N-39

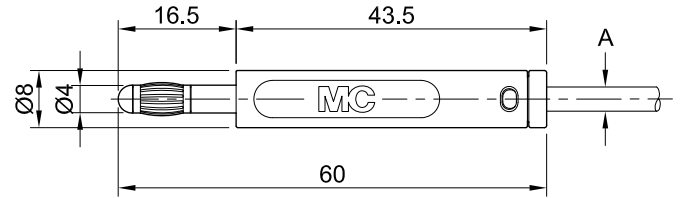


Item number 64.2054-\*

In-line, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Crimp connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 32 A / 60 V, 32 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	<span style="background-color: black; color: white; padding: 2px;">21</span> <span style="background-color: red; color: white; padding: 2px;">22</span> <span style="background-color: blue; color: white; padding: 2px;">23</span> <span style="background-color: yellow; color: black; padding: 2px;">24</span> <span style="background-color: green; color: white; padding: 2px;">25</span> <span style="border: 1px solid black; padding: 2px;">29</span>
Optional color(s)	<span style="background-color: purple; color: white; padding: 2px;">26</span> <span style="background-color: orange; color: white; padding: 2px;">27</span>
Outer diameter	8.0 mm
Test accessory acc. to	IEC EN 61010-031

# ACR25-4A-39

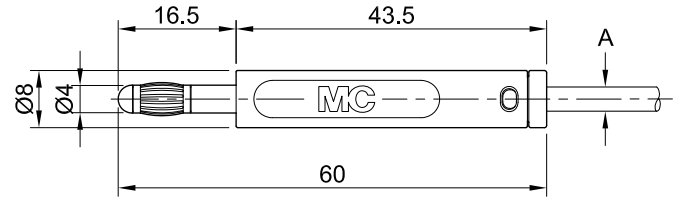

Item number 64.2055-\*

In-line, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Crimp connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 32 A / 60 V, 32 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Standard color(s) *	21 22 23 24 25 29
Optional color(s)	26 27
Outer diameter	8.0 mm
Test accessory acc. to	IEC EN 61010-031