


LQ-4N-30

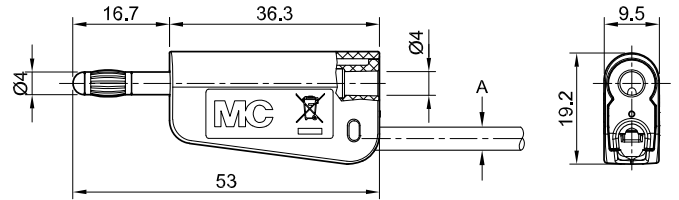


Item number 64.1038-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Solder connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 19 A / 60 V, 19 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.0 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-30; LS-SLQ-4N

LQ-4A-30

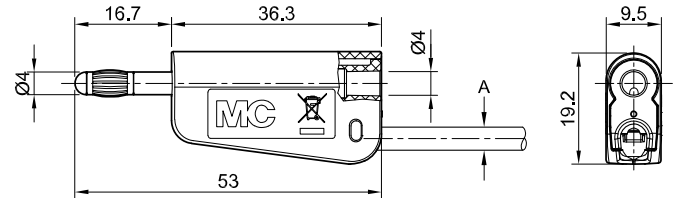


Item number 64.1039-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Solder connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 19 A / 60 V, 19 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.0 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-30; LS-SLQ-4A

LM-4N-30

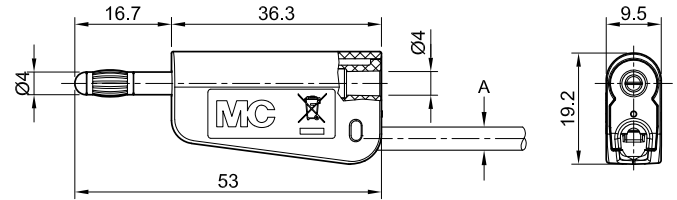


Item number 64.1040-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Screw connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 19 A / 60 V, 19 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.0 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-30; LS-SLM-4N

LM-4A-30

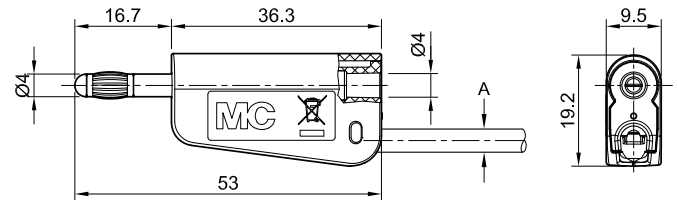


Item number 64.1041-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Screw connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 19 A / 60 V, 19 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.0 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-30; LS-SLM-4A

LQ-4N-39

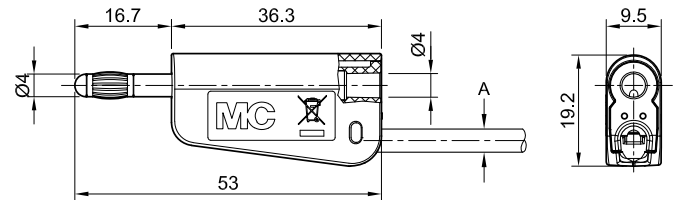


Item number 64.1042-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Solder connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 32 A / 60 V, 32 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.9 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-39; LS-SLQ-4N

LQ-4A-39

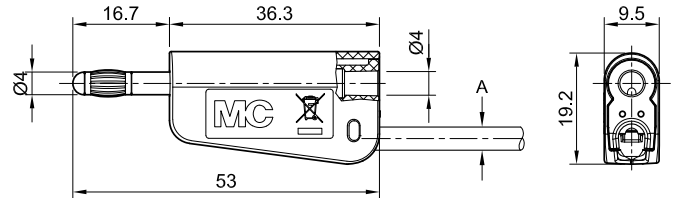


Item number 64.1043-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Solder connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 32 A / 60 V, 32 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.9 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-39; LS-SLQ-4A

LM-4N-39

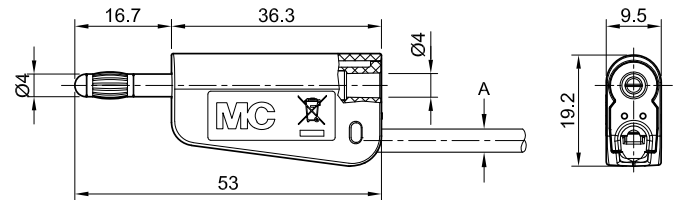


Item number 64.1044-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Screw connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 32 A / 60 V, 32 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.9 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-39; LS-SLM-4N

LM-4A-39

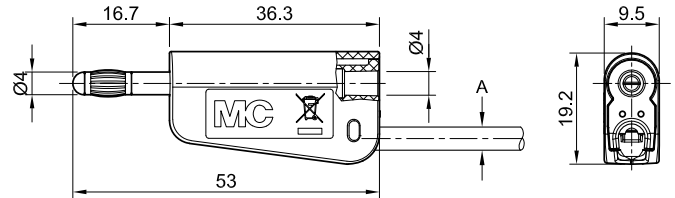

Item number 64.1045-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Screw connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 32 A / 60 V, 32 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.9 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-39; LS-SLM-4A